


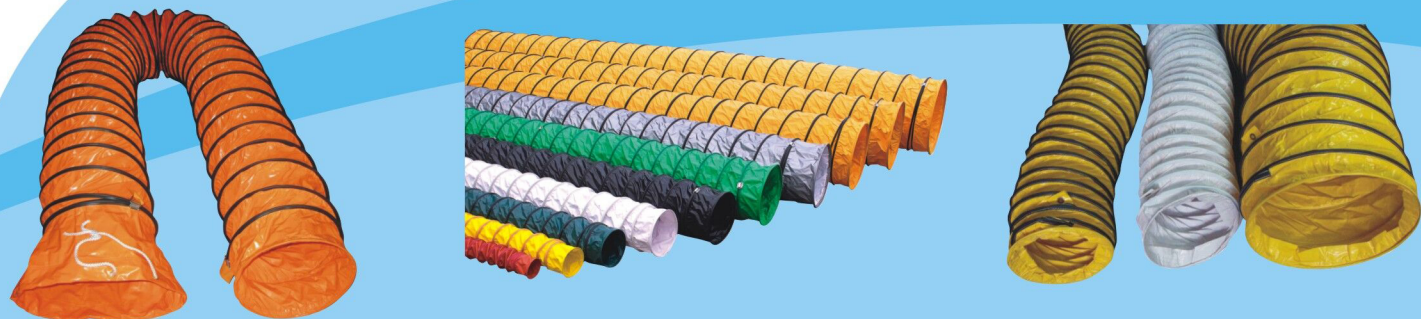


通风管简介:

- 1. 以钢丝为骨架，PVC夹网布为管身；伸缩弯转、接驳自由、体积轻巧，携带方便、耐油酸碱、耐腐蚀且阻燃；温度使用范围是-15℃~+85℃
- 2. 规格：口径:100mm-1500mm；单根长度1m-50m，与通风机之间可以方便快捷连接，配套使用。
- 3. 适用范围：通风管配合通风设备广泛应用于机房、地下室、遂道、市政管道工程、机械造船工程、采矿通风设备、消防排烟等恶劣工作环境下的送风及排气、集除烟尘之用。
- 4. 通风管有车缝和热合的选择！

Flexible Duct:

- 1. Flexible duct made of PVC flam-resistant with spiral steel reinforced. It is able to endure acid, alkali, oleic acid ect. It is easily to turn, connect and move. Temperature range: from -15℃ upto +85℃.
- 2. Diameter:100mm-1500mm standard length:5m or 10m;
- 3. Application :Widely used in these working environment such as tunnel, basement, ship building or welding, laboratory ,air-conditioner, engine room, the municipal conduct engineering, fire-fighting to ventilate or exhaust waste air, dust to supply fresh air. Keep save and effectively during working. With the strap or pp rope can conveniently connect to the portable ventilator to use together.
- 4. There are Hot seal duct or sewn duct up to the choice of the customer!

Sepcification	5m					10m				
	200mm	250mm	300mm	350mm	400mm	200mm	250mm	300mm	350mm	400mm
Meas (cm)	25X25X22	30X30X22	34X34X22	40X40X20	45X20X45	25X25X35	30X30X35	34X34X35	40X40X35	45X35X45
N. W	3kgs	3. 8kgs	4. 2kgs	5. 4kgs	6. 7kgs	5. 8kgs	7. 5kgs	8. 4kgs	10. 8kgs	13kgs
G. W.	3. 4kgs	4. 2kgs	4. 8kgs	6. 2kgs	7. 4kgs	6. 3kgs	8. 1kgs	9kgs	12. 5kgs	14. 4kgs

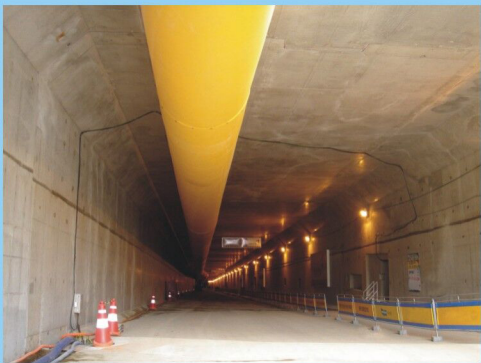

矿用导风管

- 1. 矿用导风管，强度高，韧性好，抗砸抗压，耐酸碱，防水，防腐，重量轻，易吊挂安装，使用非常方便。规格Φ500~Φ1600mm可供用户任意选择。
- 2. 每节导风管之间采用“拉链”方式连接，现场安装施工十分简便。

Tunnel Ventilation Duct

- 1. Tunnel ventilation duct can withstand high strength, good toughness, anti breaking and compressive strength, acid and alkali resistant, waterproof, anti-corrosion, light weight, easy hanging installation, very convenient to use. Specifications of DIA 500~ DIA 1600mm available to users of arbitrary choice.
- 2. Connection by zipper. It is easily to installation and transportation.



防爆风管

- 1. 防爆风管，具有阻然、抗静电、耐热、耐寒、耐酸碱的特点，管身一端装有一防静电夹。
- 2. 广泛应用于油库，易燃易爆场所，气站，瓦斯矿井等高危场所下的送风及排气，或对有害气体，易燃易爆气体留存时的排除。避免了瓦斯积聚问题，对“一通三防”的安全工作有着十分重要的作用。

Explosive-proof Ventilation Duct

- 1. Explosive-proof ventilation duct made by the fire-retardant, anti-static, heat-resistant, cold resistant, acid and alkali resistance PVC material, and the end of duct with an anti-static clamps also.
 - 2. Application: widely used in oil, flammable and explosive gas stations, mine and other high-risk places, it is use to connect with the blower to exhaust fume, dust and toxic gas and supply fresh air also!
- The explosive-proof ventilation duct with the ainti-static charater, so that is very important for the safe work!



保温风管

- 1. 材料：外层以耐磨胶条包裹的钢丝为骨架，采用阻燃PVC夹网布与保温棉复合一体的材料做管身。
- 2. 性能：具有热损耗少，风阻小，质量轻，消声效果好，节能环保等优点。
- 3. 连接方式：拉链连接，易于安装和运输。

Insulated duct

- 1. Material: PVC flam-resistant with spiral wire reinforced covering a lay of insulated foam.
- 2. Character: with the strong points of reducing heat wasting reduction, low wind resistance, good noise elimination, energy saving, environment protection ect.
- 3. connection: zipper, it is easily for installation and transportation.



塑料风机 Plastic blower

风机 Dia Mm/ inch	功率 Power (w)	电压 Voltage (v~)	频率 Frequency Hz	转速 Speed (r/min)	风量 Air Delivery (r/min)	电源线 Wire
200/8	150/200	220~240V	50/60	2900/3300	25/35	3*1mm2*4mm
200/8	150/200	110~130V	50/60	2900/3300	25/35	3*1mm2*4mm